



## EMERGENCY LUMINAIRES FOR INTERIOR USE WITH LEDs

PRODUCED IN ACCORDANCE WITH: EN 60598-1, EN 60598-2-22

"Easy LEDs Light"



- ▶ The luminaires of the "Easy LEDs Light" series were designed to be easily recess mounted in suspended ceilings and walls. The series contains all the required accessories.
- ▶ All the luminaires in this product range use high illumination LEDs with a small consumption and a great efficiency as the power source.



- ▶ Batteries Ni-Cd
- ▶ Deep-discharge and over charge battery protection
- ▶ TEST button
- ▶ Charge indication LED
- ▶ Easy installation of indication legend
- ▶ Construction material: Bayblend Fr3010, transparent polycarbonate
- ▶ Operation temperature range : 0 to 40 °C
- ▶ Relative humidity: up-to 95%



S-31100/S65L



S-31100/S65R



S-31100/S65D



S-31100/S65U




S-31100/S236

**NON-MAINTAINED LUMINAIRES**

TYPE	OPERATION VOLTAGE	MAX. POWER CONSUMPTION	BATTERIES Ni - Cd	MIN. AUTON. DURATION	LIGHT OUTPUT (maint./emerg.)	WEIGHT
<b>GR-310/4P</b>	220-240V AC/ 50-60Hz	4 VA	4.8V/1.5Ah	90 minutes	250 lm	800 gr.
<b>GR-310/6P</b>	220-240V AC/ 50-60Hz	5 VA	4.8V/ 3Ah	90 minutes	400 lm	900 gr.

**ACCESSORIES**

<b>A-3016</b>	Recess mounting base
<b>A-3018</b>	Suspended ceiling mounting springs
<b>C-101</b>	Protective metallic grid 250x460x100mm
<b>SP-114</b>	Double sided marking panel (PVC 6mm.)
<b>S-31100</b>	Exit sticker for the "Easy Light" series

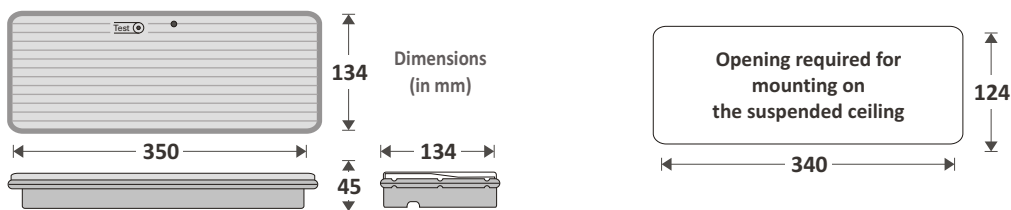

4 Power LEDs  
6 Power LEDs



90 minutes



Ni-Cd  
4.8V/1.5Ah,  
4.8V/3Ah




22 metres



IP 40

**Mounting Methods**

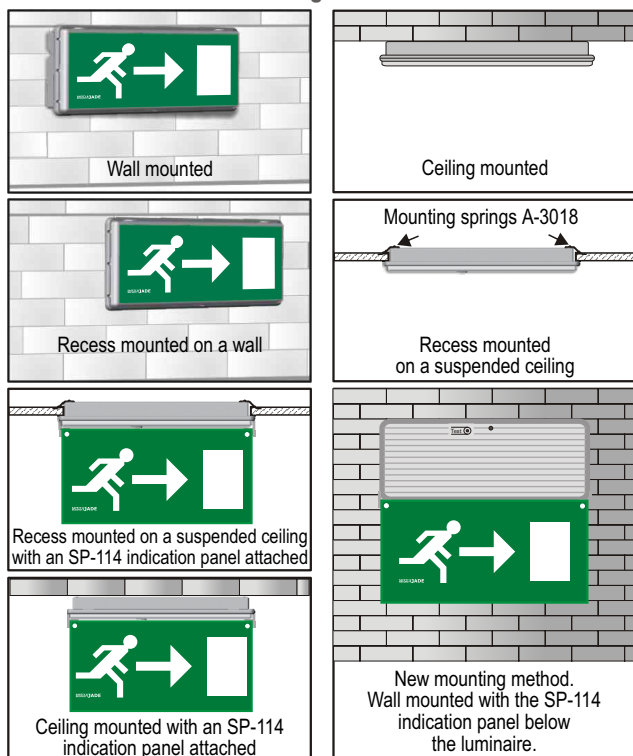

**3 years guarantee  
(1 year for battery)**

