



EMERGENCY LUMINAIRES FOR INTERIOR USE WITH LEDs

PRODUCED IN ACCORDANCE WITH: EN 60598-1, EN 60598-2-22

"Easy LEDs Light"



- ▶ The luminaires of the "Easy LEDs Light" series were designed to be easily recess mounted in suspended ceilings and walls. The series contains all the required accessories.
- ▶ All the luminaires in this product range use high illumination LEDs with a small consumption and a great efficiency as the power source.



- ▶ Batteries Ni-Cd
- ▶ Deep-discharge and over charge battery protection
- ▶ TEST button
- ▶ Charge indication LED
- ▶ Easy installation of indication legend
- ▶ Construction material: Bayblend Fr3010, transparent polycarbonate
- ▶ Operation temperature range : 0 to 40 °C
- ▶ Relative humidity: up-to 95%



S-31100/S65L



S-31100/S65R



S-31100/S65D



S-31100/S65U





S-31100/S236

MAINTAINED / NON-MAINTAINED (OPTIONAL) LUMINAIRES

TYPE	OPERATION VOLTAGE	MAX. POWER CONSUMPTION	BATTERIES Ni - Cd	MIN. AUTON. DURATION	LIGHT OUTPUT (maint./emerg.)	WEIGHT
GR-310/12L/180	220-240V AC/ 50-60Hz	4 VA / 3.5W	3.6V/1.5Ah	180 minutes	35/85 lm	740 gr.

ACCESSORIES

A-3016	Recess mounting base
A-3018	Suspended ceiling mounting springs
C-101	Protective metallic grid 250x460x100mm
SP-114	Double sided marking panel (PVC 6mm.)
S-31100	Exit sticker for the "Easy Light" series

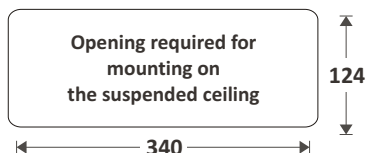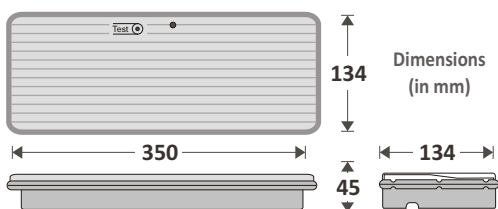

LEDs of high luminosity



Minimum 180 min.



Ni-Cd 3.6V/1.5Ah







22 metres



IP 40

Mounting Methods

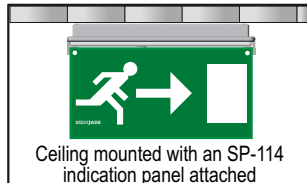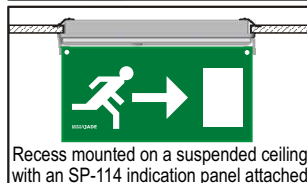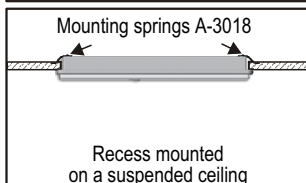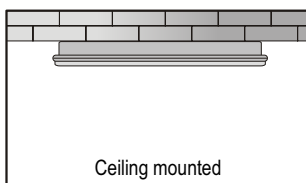

3 years guarantee
(1 year for battery)

