



WATERPROOF EMERGENCY LUMINAIRES WITH LEDS

PRODUCED IN ACCORDANCE WITH: EN 60598-1, EN 60598-2-22

“Weather LEDs Light”

“Intelligent Weather LEDs Light”



- ▶ Batteries Ni-Cd
- ▶ Deep-discharge and over charge battery protection
- ▶ Charge indication LED
- ▶ Construction material: ABS, Polycarbonate, Aluminum.

- ▶ Operation temperature range : 0 to 40 °C
- ▶ Relative humidity: up-to 95%



S-93593/S65L



S-93593/S65R



S-93593/S65D



S-93593/S65U



S-93593/S236

MAINTAINED / NON-MAINTAINED (OPTIONAL) LUMINAIRES

TYPE	OPERATION VOLTAGE	MAX. POWER CONSUMPTION	BATTERIES Ni - Cd	MIN. AUTON. DURATION	LIGHT OUTPUT (maint./emerg.)	WEIGHT
GR-935/4P	220-240V AC/ 50-60Hz	4VA	4.8V / 1.5Ah	90 min.	250 lm	900 gr.
GR-935/6P	220-240V AC/ 50-60Hz	5VA	4.8V / 3Ah	90 min.	400 lm	980 gr.

SELF-TESTING EMERGENCY LUMINAIRES




TYPE	OPERATION VOLTAGE	MAX. POWER CONSUMPTION	BATTERIES Ni - Cd	MIN. AUTON. DURATION	LIGHT OUTPUT (maint./emerg.)	WEIGHT
GR-938/4P	220-240V AC/ 50-60Hz	13VA	4.8V / 1.5Ah	90 min.	125/200 lm	840 gr.
GR-938/6P	220-240V AC/ 50-60Hz	16.5VA	4.8V / 3Ah	90 min.	200/400 lm	940 gr.

ACCESSORIES

C-101	Protective metallic grid 250x460x100mm
S-93593	Exit sticker 260x120mm (waterproof)



C-101

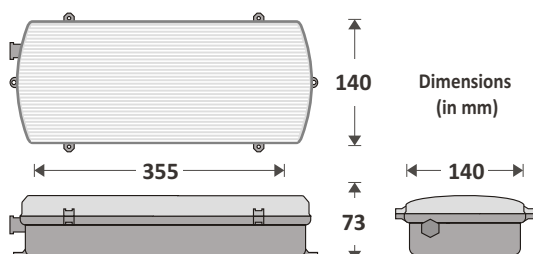

3 years guarantee
(1 year for battery)

